

GuardALL[®]
Guard for ALL

PRODUCT CATALOG



DRY POWDER

Dry Powder is highly versatile fire extinguisher agent. This agent is suitable for Fire Class A, B & C. Dry Powder extinguisher is properly used to put down fire caused by electrical hazards, flammable liquids and gases, also suitable for vehicle fire.



FOAM

Foam extinguisher is suitable for both Fire Class A & B. Foam extinguisher has ability to prevent fire to reignite and at the same time cooling down fire.



Wood, Paper, Textile, Fabric



Petrol, Diesel, Oils

TYPE	GFO-6	GFO-9
Height (cm)	51	58
Width (cm)	30	34
Diameter (cm)	16	18.7
Capacity (kg)	6	9
Weight full (kg)	8.7	12.5
Weight empty (kg)	2.7	3.5
Discharge time (sec)	24	39
Discharge range (m)	3 to 12	3 to 12
Test pressure (bar)	25	25
Working pressure at 20°C (bar)	15	15
Minimum effective discharge (%)	90	90
Temperature range (°C)	0 to 60	0 to 60
Fire rating	N/A	N/A
Skirt	Shock Absorber	Shock Absorber
Special Feature	Firecek App Integration	

FIRE EXTINGUISHER



Wood, Paper, Textile, Fabric



Petrol, Diesel, Oils



Electrical



Magnesium, Titanium, Potassium

TYPE	GAP-1	GAP-2	GAP-3	GAP-5	GAP-6	GAP-9
Height (cm)	32	36	44	51	51	58
Width (cm)	11	13	27	30	30	34
Diameter (cm)	8	11.3	13.6	15	16	18.7
Capacity (kg)	1	2	3	5	6	9
Weight full (kg)	1.7	3	4.6	7.5	8.7	12.5
Weight empty (kg)	0.7	1	1.6	2.5	2.7	3.5
Discharge time (sec)	11	19	14	21	24	39
Discharge range (m)	3 to 12	3 to 12	3 to 12	3 to 12	3 to 12	3 to 12
Test pressure (bar)	25	25	25	25	25	25
Working pressure at 20°C (bar)	15	15	15	15	15	15
Effective discharge (%)	±95	±95	±95	±95	±95	±95
Temperature range (°C)	-20 to 60	-20 to 60	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Fire rating	1A	2A : 4B	3A : 6B	5A : 10B	6A : 15B	7A
Skirt	-	-	Shock Absorber	Shock Absorber	Shock Absorber	Shock Absorber
Special Feature	Firecek App Integration					

CO₂

CO₂ extinguisher is suitable for fire caused by electrical hazzards and Fire Class B. CO₂ extinguisher also well-known for its non-damaging and anti-static, also the clean liness.



Petrol, Diesel, Oil



Electrical

TYPE	GCO-2.2	GCO-3	GCO-5	GCO-6.8
Height (cm)	50	70.5	77.5	97.5
Width (cm)	18	18	29.5	29.5
Diameter (cm)	11	11	14.5	14.5
Capacity (kg)	2.2	3	5	6.8
Weight full (kg)	7.1	11.1	16.8	20.3
Weight empty (kg)	4.9	8.1	11.8	13.5
Discharge time (sec)	8	10	18	23
Discharge range (m)	3 to 12	3 to 12	3 to 12	3 to 12
Test pressure (bar)	200	200	200	200
Working pressure at 20°C (bar)	56	56	56	56
Minimum effective discharge (%)	90	90	90	90
Temperature range (°C)	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Fire rating	2B	3B	4B	5B
Skirt	-	-	-	-
Special Feature	Firecek App Integration			

GuardALL

HFC-125

HFC-125 is a clean agent and known as the world’s most eco friendly extinguisher. It is actually a substitute for halon fire extinguisher. HFC-125 is suitable for A, B, and C fire classes. It’s a safe agent for fire that caused by electrical appliance since the agent itself is not a conductor and does not leave residues.



Wood, Paper,
Textile, Fabric



Petrol, Diesel,
Oils



Electrical



Magnesium, Titanium,
Potasium

TYPE	GAH-1	GAH-3	GAH-6	GAH-9
Height (cm)	32	44	51	58
Width (cm)	11	27	30	34
Diameter (cm)	8	13.6	16	18.7
Capacity (kg)	1	3	6	9
Weight full (kg)	1.7	4.6	8.7	12.5
Weight empty (kg)	0.7	1.6	2.7	3.5
Discharge time (sec)	11	14	24	39
Discharge range (m)	3 to 12	3 to 12	3 to 12	3 to 12
Test pressure (bar)	25	25	25	25
Working pressure at 20°C (bar)	15	15	15	15
Effective discharge (%)	±95	±95	±95	±95
Temperature range (°C)	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Fire rating	N/A	N/A	N/A	N/A
Skirt	-	Shock Absorber	Shock Absorber	Shock Absorber
Special Feature	Firecek App Integration			

TROLLEY FIRE EXTINGUISHER

DRY POWDER TROLLEY

Trolley dry chemical powder fire extinguishers is best used in a place where a large amount of fire extinguishing agent is required. GuardALL trolley dry chemical powder can be used on Fire Class A, B, C and D. GuardALL Trolley fire extinguisher features stainless steel cylinder, ultra-high UV powder coated with red finishing and galvanised powder coated red trolley. Available in 25kg, 50kg, 68kg and 80kg sizes.



Wood, Paper,
Textile, Fabric



Petrol, Diesel,
Oils



Electrical



Magnesium, Titanium,
Potasium

Type	GAPT-25	GAPT-50	GAPT-68	GAPT-80
Capacity (kg)	25	50	68	80
Temperature Range (°C)	-20°C TO 60°C	-20°C TO 60°C	-20°C TO 60°C	-20°C TO 60°C
Working pressure at 20°C (bar)	15	15	15	15
Special Feature	Firecek App Integration			



AFFF FOAM TROLLEY

GuardALL is 25 litre and 50 litre trolley fire extinguisher is suitable for Fire Class A & B , that caused by wood, paper, plastic, rubber and rubbish, as well as flammable such as petrol. GuardALL AFFF Foam Trolley Extinguisher has a stainless steel cylinder, ultra high uv powder coated red finish and galvanised red coated trolley.



Wood, Paper,
Textile, Fabric



Petrol, Diesel,
Oils

Type	GFOT-25	GFOT-50
Capacity (kg)	25	50
Temperature Range (°C)	-20°C TO 60°C	-20°C TO 60°C
Working pressure at 20°C (bar)	15	15
Special Feature	Firecek App Integration	



CO₂ TROLLEY

GuardALL CO₂ Trolley Extinguisher is suitable for room with so many electrical equipments and Fire Class B. This trolley extinguisher is well-known for its non-damaging agent and highly effective performance, also the cleanliness. This trolley is a perfect extinguisher withstand extreme temperatures, dirty environment and uv degradation.



Petrol, Diesel,
Oil



Electrical

Type	GCOT-25
Capacity (kg)	25
Temperature Range (°C)	-20°C TO 60°C
Test Pressure (bar)	25
Special Feature	Firecek App Integration

GuardALL



TESTED & CERTIFIED
FIRE EXTINGUISHERS

Our fire extinguishers performances have been tested and certified by Jakarta Fire Department.

THERMATIC
FIRE EXTINGUISHER

Functions like a sprinkle system, Thermatic fire extinguisher works automatically. When the temperature in the room has reached a certain temperature, it will automatically spout the extinguishing media (clean agent) through the tip of the sprinkler.

TYPE	GHTH-5
Capacity (kg)	5
Working pressure	125 Psi
Detector temperature	68°C
Overall height (mm)	328
Overall width (mm)	278
Extinguisher Agent	HFC-125
Protection range	8.5 m² at 25°C to 30°C
Working pressure at 20°C	15
Special Feature	Firecek App Integration



Wood, Paper,
Textile, Fabric



Petrol, Diesel,
Oils



Electrical




Magnesium, Titanium,
Potassium

POWERED BY
FIRECEK APP

GuardALL makes it easy for you to manage all your fire extinguisher, wherever and whenever with excellent services from our special team.

Our products are equipped with a Firecek QR code. So, you just need to scan the QR code using your smartphone and save it to the Firecek’s inventory feature.

THE FIRST FIRE EXTINGUISHERS
CHECKING APPLICATION IN THE WORLD

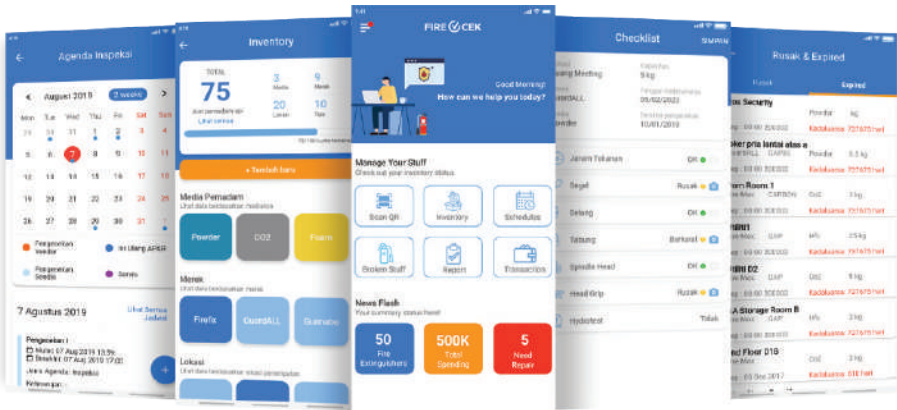

Download FIRECEK
Free Now!

FIRECEK | YOUR FIRE ASSISTANT | firecek.com

*The tube’s design may change at anytime without confirmation.

GuardALL[®]
Guard for ALL

guardall.co.id