

FireFix
FEAR NO FIRE

PRODUCT CATALOG



COMPLETE FIRE PROTECTION

HYDRANT PILAR

Fire hydrant pillar plays a special function as a water supplier during a fire. Fire hydrant pillar Firefix is made of best-quality steel which makes it durable and anti-corrosion in any weather.

HYDRANT PILAR



HYDRANT PILLAR ONE WAY

ACCESSORY

Main Valve

MODEL

Machino & VDH

SIZE

3" x 2,5"



HYDRANT PILLAR TWO WAY

ACCESSORY

Main Valve & Ball Valve

MODEL

Machino & VDH

SIZE

4" x 2,5" x 2,5"

HYDRANT BOX

Firefix hydrant box is made of steel plate materials and high quality paint, featuring a glass window and key. It is able to store fire hydrant equipments neatly.

HYDRANT BOX



INDOOR HYDRANT BOX TYPE A

TYPE	A1	A2
SIZE	66 x 52 x 15 cm	100 x 80 x 18 cm
PLATE	1,2 mm Mild Steel	
PRODUCTION PROCESS	Dust Remover, Phospating & Zincromate Primer	
FINISHING	Top Coast Powder Coating Red Signal	



HYDRANT BOX TYPE B

TYPE	B
SIZE	125 x 75 x 18 cm
PLATE	1,2 mm Mild Steel
PRODUCTION PROCESS	Dust Remover, Phospating & Zincromate Primer
FINISHING	Top Coast Powder Coating Red Signal



OUTDOOR HYDRANT BOX TYPE C

TYPE	C
SIZE	955 x 66 x 20 cm
PLATE	1,2 mm Mild Steel
PRODUCTION PROCESS	Dust Remover, Phospating & Zincromate Primer
FINISHING	Top Coast Powder Coating Red Signal

HYDRANT VALVE

Firefix hydrant valve is specially designed with best-quality materials and precise anodized finishing. Firefix hydrant valve is anti-corrosive and able to drain water up to 10 bar.



HYDRANT VALVE



SIZE

1.5 "

2"

2.5 "

SIZE	1.5"	2"	2.5"
MATERIAL	Brass	Brass	Brass
FINISHING	Anodize	Anodize	Anodize
WEIGHT	0.95 kg	1.70 kg	2.70 kg
LENGTH	110 mm	130 mm	160 mm
MODEL	Machino	Machino	Machino
CLASS	16K/20K	16K/20K	16K/20K

FIRE HOSE

A special design that can withstand high pressure and is able to withstand pressures up to 42 bar. Firefix fire hydrant hose can also be used at temperatures of -5° to 200°C.



FIRE HOSE

TYPE

RED RUBBER

PU/CANVAS

EPDM

RED RUBBER

I.D (Inch/mm)	Working Pressure (Bar/Psi)	Burst Pressure (Bar/Psi)	Lenght (meter)	Temperature (F/C)
2,5" / 65	17/250-21/300	28/400-42/600	20 & 30	-5° to 200°F / -20° to 95°F
2" / 50	17/250-21/300	28/400-42/600	20 & 30	-5° to 200°F / -20° to 95°F
1,5" / 38	13/186-17/250	20/280-28/400	20 & 30	-5° to 200°F / -20° to 95°F

PU

I.D (Inch/mm)	Working Pressure (Bar/Psi)	Burst Pressure (Bar/Psi)	Lenght (meter)	Temperature (F/C)
2" / 52	13/186-17/250	20/280-28/400	20 & 30	-5° to 200°F / -20° to 95°F
2,5" / 65	13/186-17/250	20/280-28/400	20 & 30	-5° to 200°F / -20° to 95°F

EPDM

I.D (Inch/mm)	Working Pressure (Bar/Psi)	Burst Pressure (Bar/Psi)	Lenght (meter)	Temperature (F/C)
2" / 52	13/186-17/250	20/280-28/400	20 & 30	-5° to 200°F / -20° to 95°F
2,5" / 65	13/186-17/250	20/280-28/400	20 & 30	-5° to 200°F / -20° to 95°F

HOSE REEL

Firefix hose reel has tough-construction which provides best and reliable performance. The hose reel is able to mount on a flat wall with a restricted area or even in an inconvenient position.

HOSE REEL



HOSE REEL OPTION

- Fixed / Swing types
- Mild Steel / Stainless Steel Material
- 19 mm / 25mm Diameter Hoses
- Jet / Spray Rotary Operated Nozzle

TECHNICAL SPECIFICATIONS

TYPES	Hose Lenght	Nozzle Diameter	Flow Rate at 6 kgs/cm ² inlet pressure	Flow Rate at 2 kgs/cm ² inlet pressure
SWING HOSE REEL 19mm	30m	6mm	43.0	26.5
SWING HOSE REEL 25mm	30m	6mm	46.0	27.0
FIXED HOSE REEL 19mm	30m	6mm	43.0	26.0
FIXED HOSE REEL 25mm	30m	6mm	46.0	27.0

HOSE RACK

Firefix hose rack helps you to tidy up the fire hose. Made of high-quality aluminium coated with chrome finishing that makes this hose rack anti-corrosive.

HOSE RACK



SIZE

1.5 "

2.5 "

SIZE

1.5"

2.5"

MATERIAL

Aluminium A380

Aluminium A380

FINISHING

Chrome Plated

Chrome Plated

WEIGHT

0.70 kg

0.80 kg

LENGTH

52.5 cm

53.5 cm

SIAMESE CONNECTION

Firefix siamese connection has a quality that has been tested and proven reliability in various applications, both in the highlands and the coast.




SIAMESE CONNECTION

TYPE	S7	S11
SIZE	4" x 2,5" x 2,5"	4" x 2,5" x 2,5"
MATERIAL	Brass	Brass
MODEL	Machino & VDH	Machino & VDH

HYDRANT NOZZLE

Firefix hydrant nozzle is made of high-quality aluminum material which makes it durable and anti-corrosion in all weather

JET NOZZLE

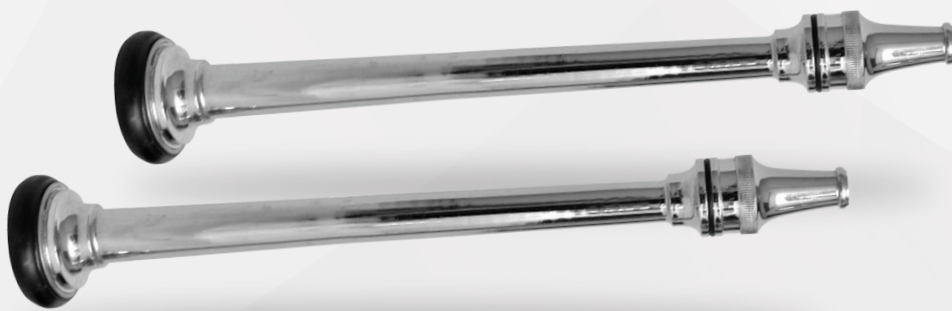

SIZE

1.5 "

2 "

2.5 "

SIZE	1.5"	2"	2.5"
MATERIAL	Brass	Brass	Brass
FINISHING	Anodize	Anodize	Anodize
WEIGHT	0.364 kgs	0.647 kgs	1.065 kgs
LENGTH	457 mm	590 mm	730 mm
MODEL	Machino	Machino	Machino

TESTED & CERTIFIED FIRE EXTINGUISHERS

Our fire extinguishers performances have been tested and certified by Jakarta Fire Department with registration number

LAB-DAMKAR-DKI-NO 11/LHU/I/2020



PORTABLE FIRE EXTINGUISHERS



DRY POWDER

Dry powder is highly versatile fire fighting agent for A, B, C & D fire classes and suitable for most risk. In addition, to deal with electrical hazards, flammable liquids, gasses and metals, it also effective for vehicle fires.



Wood, Paper
Textile, Fabric



Petrol, Diesel
Oils



Electrical



Magnesium, Titanium
Potassium

TYPE

FP-1

FP-2

FP-3

FP-3.5

FP-4

FP-4.5

FP-5

FP-6

FP-9



AFFF FOAM

Spray-foam extinguisher is suitable for both A & B fire classes. It works by covering fire and eliminate contact between fire and oxygen. It will cool down fire and prevents the fire starts to burn again. In addition, it also prevents explosions on the fire's spot.



Wood, Paper
Textile, Fabric



Petrol, Diesel
Oils

TYPE

FFO-6

FFO-9



CO₂

Carbon dioxide agent is suitable for fire that caused by electrical equipments or B fire class. The carbon dioxide agent also recognized for its non-damage, highly effective performance and cleanliness.



Petrol, Diesel
Oils



Electrical

TYPE

FC-2.2

FC-3

FC-5

FC-6.8

DRY POWDER

TYPE	FP-1	FP-2	FP-3	FP-3.5	FP-4	FP-4.5	FP-5	FP-6	FP-9
Height (cm)	31	42	46	47.5	47.5	50	50	55.5	60
Width (cm)	10.5	19.5	24	22	22	24	24	24	24
Diameter (cm)	8.5	10.7	12.5	12.8	12.8	14.5	14.5	14.5	17
Capacity (kg)	1	2	3	3.5	4	4.5	5	6	9
Weight full (kg)	1.6	3.3	4.5	5	5.5	6.8	7.3	8.5	12.5
Weight empty (kg)	0.6	1.3	1.5	1.5	1.5	2.3	2.3	2.5	3.5
Discharge time (sec)	11	13	14	15	18	21	21	24	39
Discharge range (m)	3 to 12	3 to 12	3 to 12	3 to 12	3 to 12	3 to 12	3 to 12	3 to 12	3 to 12
Test pressure (bar)	25	25	25	25	25	25	25	25	25
Working pressure at 20°C (bar)	15	15	15	15	15	15	15	15	15
Minimum effective discharge (%)	±95	±95	±95	±95	±95	±95	±95	±95	±95
Temperature range (°C)	-20 to 60	-20 to 60	-20 to 60	-20 to 60	-20 to 60	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Fire rating	1A : 2B	2A : 4B	3A : 6B	3A : 6B	4A : 8B	4A : 8B	5A : 10B	5A : 12B	7A : 15B
Special feature	Firecek App Integration								

AFFF FOAM

TYPE	FFO-6	FFO-9
Height (cm)	55.5	60
Width (cm)	24	24
Diameter (cm)	14.5	17
Capacity (kg)	6	9
Weight full (kg)	8.5	12.5
Weight empty (kg)	2.5	3.5
Discharge time (sec)	27	29
Discharge range (m)	3 to 12	3 to 12
Test pressure (bar)	25	25
Working pressure at 20°C (bar)	15	15
Minimum effective discharge (%)	90	90
Temperature range (°C)	0 to 60	0 to 60
Fire rating	N/A	N/A
Special feature	Firecek App Integration	

CO₂

TYPE	FC-2.2	FC-3	FC-5	FC-6.8
Height (cm)	50	70.5	77.5	97.5
Width (cm)	18	18	29.5	29.5
Diameter (cm)	11	11	14.5	14.5
Capacity (kg)	2.2	3	5	6.8
Weight full (kg)	7.1	11.1	16.8	20.3
Weight empty (kg)	4.9	8.1	11.8	13.5
Discharge time (sec)	8	10	18	23
Discharge range (m)	3 to 12	3 to 12	3 to 12	3 to 12
Test pressure (bar)	200	200	200	200
Working pressure at 20°C (bar)	56	56	56	56
Minimum effective discharge (%)	90	90	90	90
Temperature range (°C)	-20 to 60	-20 to 60	-20 to 60	-20 to 60
Fire rating	1B	2B	3B	4B
Special feature	Firecek App Integration			



TROLLEY FIRE EXTINGUISHERS



POWDER TROLLEY

Trolley dry powder fire extinguisher is best for places that required large amount of fire extinguishers' agent. Featured stainless steel cylinder, ultra-high UV powder coated with red-painted finishing and galvanised powder coated red trolley.



Wood, Paper
Textile, Fabric



Petrol, Diesel
Oils



Electrical



Magnesium, Titanium
Potassium

TYPE

FPT-20

FPT-25

FPT-50



AFFF FOAM TROLLEY

Firefix's 25 litre and 50 litre AFFF Foam mobile extinguishers are best suited for A and B fire classes. They have a stainless steel cylinder, ultra-high UV powder coated with red-painted finishing and galvanised red coated trolley.



Wood, Paper
Textile, Fabric



Petrol, Diesel
Oils

TYPE

FFOT-25

FFOT-50

CO₂ TROLLEY

Trolley carbon dioxide fire extinguisher is characterized by their high performance for fires involving electrical risk like computers, office equipments, generators and etc. Its non-conductive, clean and safe agent, ensuring minimal damage to electrical equipments and furnishings.



Petrol, Diesel
Oils



Electrical

TYPE

FCOT-25

POWDER TROLLEY


TYPE	FPT-20	FPT-25	FPT-50
Fire class	A, B, C, D	A, B, C, D	A, B, C, D
Extinguisher Agent	Dry Powder	Dry Powder	Dry Powder
Capacity (kg)	20	25	50
Temperature Range (°C)	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C
Working pressure at 20°C (bar)	15	15	15
Special feature	Firecek App Integration		

AFFF FOAM

TYPE	FFOT-25	FFOT-50
Fire class	A, B	A, B
Extinguisher Agent	AFFF Foam	AFFF Foam
Capacity (kg)	25	50
Temperature Range (°C)	-20°C to 60°C	-20°C to 60°C
Working pressure at 20°C (bar)	15	15
Special feature	Firecek App Integration	

CO₂ TROLLEY

TYPE	FFOT-25
Fire class	B, C
Extinguisher Agent	CO ₂
Capacity (kg)	25
Temperature Range (°C)	-20°C to 60°C
Test Pressure (bar)	25
Special feature	Firecek App Integration

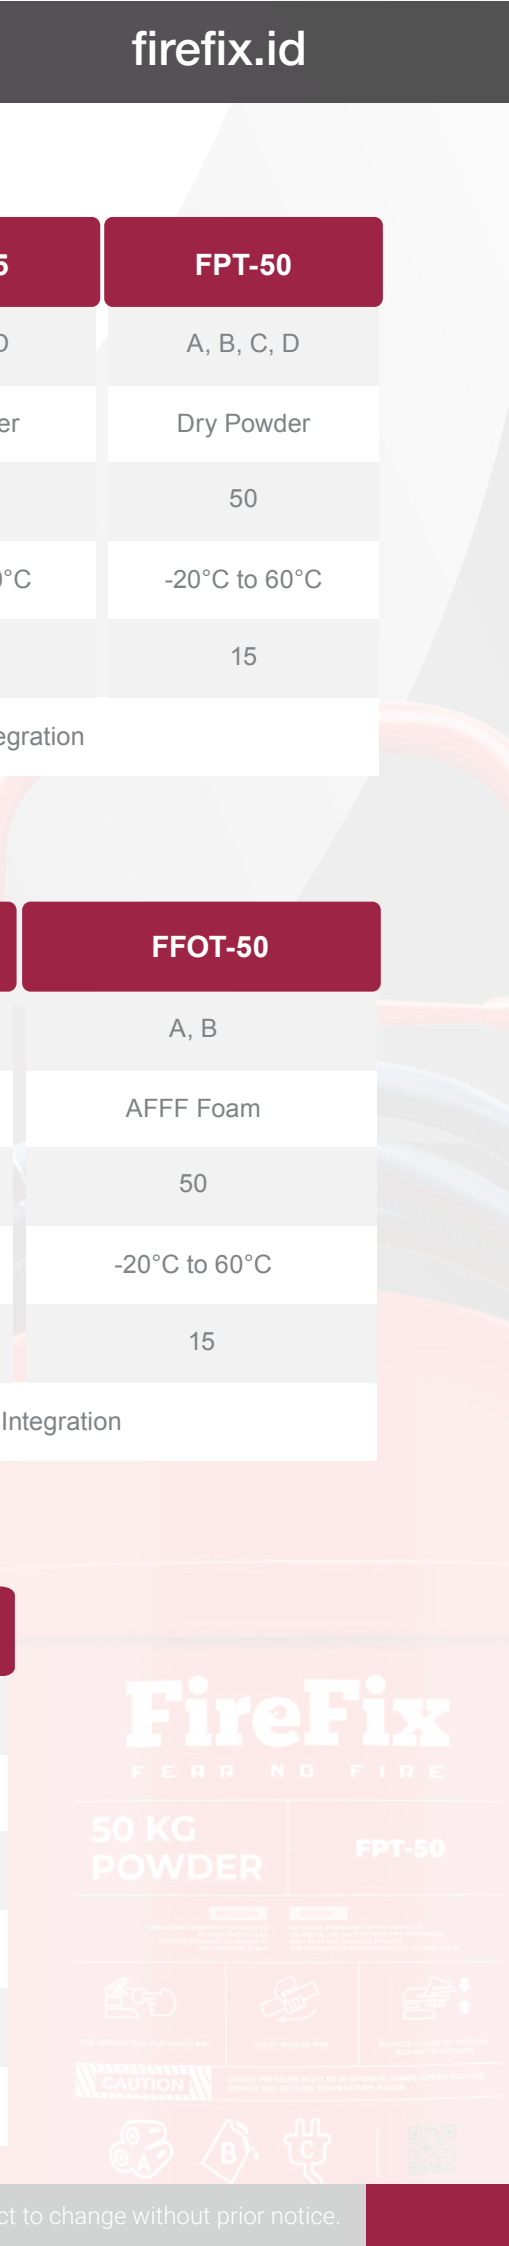

THERMATIC FIRE

EXTINGUISHER

For Automatic Protection



THERMATIC FIRE EXTINGUISHERS



CLEAN AGENT

Thermatic fire extinguisher is a fire protection device that works automatically based on the temperature. When, the room’s temperature where the thermatic fire extinguisher is installed hits a certain point, the bulb will break and let the media spread through the tip to stop fire.



Wood, Paper
Textile, Fabric



Petrol, Diesel
Oils



Electrical



Magnesium,
Titanium Potassium

TYPE

FHTH-5

TYPE	FHTH-5
Height	290 mm
Width	272 mm
Capacity	5 kg
Fire Class	A, B, C, D
Extinguisher Agent	Clean Agent
Protection Range	±8,5 m² at 25°C to 30°C
Working Pressure	125 Psi
Detector temperature	68°C
Special Feature	Firecek App Integration



RISK FREE 5 YEARS GUARANTEE

- Verified by Jakarta Fire Department
- Free Fire Extinguishers Checking Application

GET FIRE  CEK APP
YOUR FIRE ASSISTANT!

FIREFIX POWERED BY FIRECEK APP

Leave fire extinguisher tags and turn to Firecek App, the solution for checking your fire extinguishers. Easy, safe and fast. Firecek makes it easy for you to manage all your fire extinguishers, wherever and whenever with excellent services from our special team.

Our products are equipped with a Firecek QR code. So, you just need to scan the QR code using your smartphone and save it to the Firecek's inventory feature.



THE BENEFITS

- Unlimited storage
- More than 1000 fire extinguishers in one account
- Handled by Special Team
- We work with the best fire protection vendors in your city
- Full control
- You got full access to manage your stuffs

*T&C: Optional by customer request and service coverage availability.

THE FIRST FIRE EXTINGUISHERS CHECKING APPLICATION IN THE WORLD



Download FIRECEK
Free Now!

FireFix

F E A R N O F I R E